

THE Vertex

BACKSHEET MONOCRYSTALLINE MODULE

510W

MAXIMUM POWER OUTPUT

21.2%

MAXIMUM EFFICIENCY

0~+5W

POSITIVE POWER TOLERANCE

Founded in 1997, Trina Solar is the world's leading total solution provider for solar energy. With local presence around the globe, Trina Solar is able to provide exceptional service to each customer in each market and deliver our innovative, reliable products with the backing of Trina as a strong, bankable brand. Trina Solar now distributes its PV products to over 100 countries all over the world. We are committed to building strategic, mutually beneficial collaborations with installers, developers, distributors and other partners in driving smart energy together.

Comprehensive Products and System Certificates

IEC61215/IEC61730/IEC61701/IEC62716/UL61730
 ISO 9001: Quality Management System
 ISO 14001: Environmental Management System
 ISO14064: Greenhouse Gases Emissions Verification
 ISO45001: Occupational Health and Safety Management System



PRODUCTS

TSM-DE18M.08(II)

POWER RANGE

485-510W



High power & efficiency

- Maximum energy harvesting from roofs
- 60W higher than the previous generation



Aesthetics

- Black frame design for an attractive appearance



Cutting edge technology

- Industry-leading 210mm triple-cut solar cells
- Best-in-class engineering, manufacturing processes and quality control
- Assembly in fully automated and newly built state-of-the-art factories



High quality

- Extra protection with extended 15-year product warranty and 25-year performance warranty
- Beyond industry-standard hail test passed: 35mm hail size
- Carefully selected materials for the best reliability also in demanding climates
- Snow load up to 6000 pa, wind load up to 2400pa



Easy design & installation

- Mainstream rooftop mounting methods approved
- High compatibility with mainstream inverters and optimizers



Optimized BOS cost


- Lower cost for structure, cable, workmanship per Wp




Stock efficiency

- Only one stock item to fit all application scenarios on larger rooftops


Trina Solar's Vertex Backsheet Performance Warranty

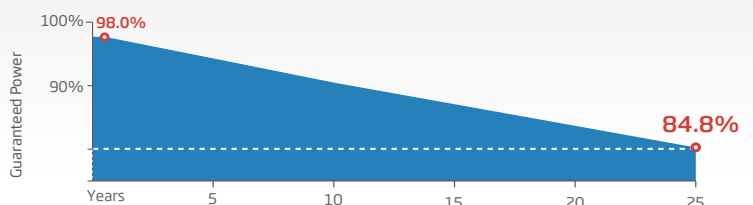


DIMENSIONS OF PV MODULE(mm)

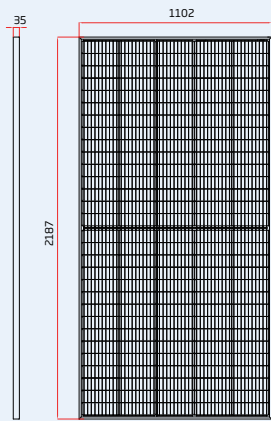


Front View

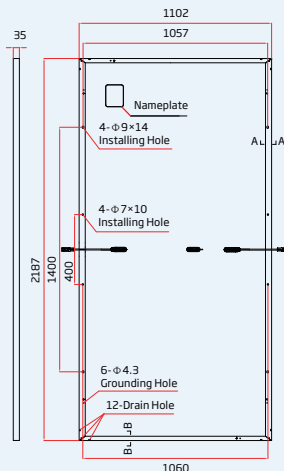


Back View



I-V CURVES OF PV MODULE(495 W)

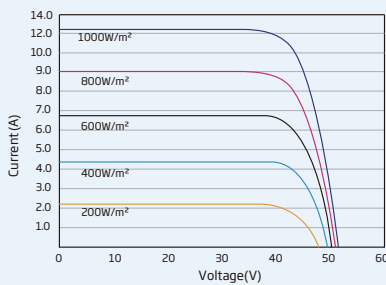

P-V CURVES OF PV MODULE(495W)

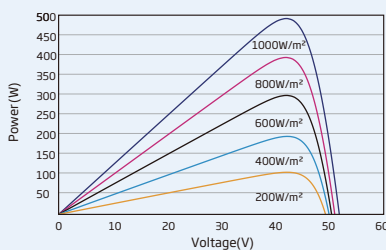

ELECTRICAL DATA (STC)

Peak Power Watts- P_{MAX} (Wp)*	485	490	495	500	505	510
Power Tolerance- P_{MAX} (W)	0 ~ +5					
Maximum Power Voltage- V_{MPP} (V)	42.2	42.4	42.6	42.8	43.0	43.2
Maximum Power Current- I_{MPP} (A)	11.49	11.56	11.63	11.69	11.75	11.81
Open Circuit Voltage- V_{OC} (V)	51.1	51.3	51.5	51.7	51.9	52.1
Short Circuit Current- I_{SC} (A)	12.07	12.14	12.21	12.28	12.35	12.42
Module Efficiency η_m (%)	20.1	20.3	20.5	20.7	21.0	21.2

STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5.

*Measuring tolerance: ±3%.

ELECTRICAL DATA (NOCT)

Maximum Power- P_{MAX} (Wp)	365	369	373	377	381	385
Maximum Power Voltage- V_{MPP} (V)	39.9	40.0	40.2	40.4	40.6	40.5
Maximum Power Current- I_{MPP} (A)	9.17	9.22	9.28	9.33	9.38	9.50
Open Circuit Voltage- V_{OC} (V)	48.1	48.2	48.4	48.6	48.8	49.0
Short Circuit Current- I_{SC} (A)	9.73	9.78	9.84	9.90	9.95	10.01

NOCT: Irradiance at 800W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

MECHANICAL DATA

Solar Cells	Monocrystalline
Cell Orientation	150 cells
Module Dimensions	2187×1102×35 mm (86.10×43.39×1.38 inches)
Weight	26.5 kg (58.4 lb)
Glass	3.2 mm (0.13 inches), High Transmission, AR Coated Heat Strengthened Glass
Encapsulant Material	EVA
Backsheet	White
Frame	35 mm (1.38 inches) Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0mm ² (0.006 inches ²), Portrait: N 280mm/P 280mm(11.02/11.02inches) Landscape: N 1400 mm /P 1400 mm (55.12/55.12 inches)
Connector	MC4 EVO2 / TS4*

*Please refer to regional datasheet for specified connector.

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43°C (±2°C)
Temperature Coefficient of P_{MAX}	-0.34%/°C
Temperature Coefficient of V_{OC}	-0.25%/°C
Temperature Coefficient of I_{SC}	0.04%/°C

MAXIMUM RATINGS

Operational Temperature	-40~+85°C
Maximum System Voltage	1500V DC (IEC)
	1500V DC (UL)
Max Series Fuse Rating	20A

WARRANTY

15 year Product Workmanship Warranty
25 year Power Warranty
2% first year degradation
0.55% Annual Power Attenuation

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box: 31 pieces
Modules per 40' container: 620 pieces